




## Product sheet

Art.Nr. **LNL7621/WHE**

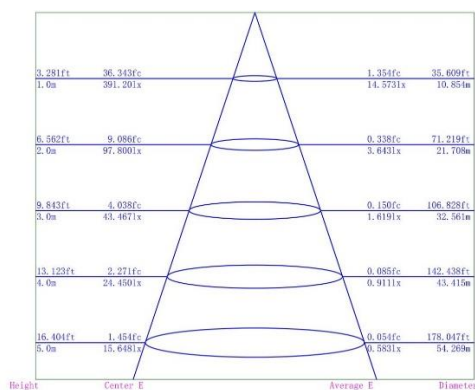


- 15W
- AC180-265V
- 1700Lm
- IP44
- Power switch
- Dimension 595 x 57 x 65mm
- Weight netto – 468g
- 3000K - 4000K – 6000K
- E
- 150°
- 30000h
- Warranty 3 years
- Packing 1/25
- Recommended ambient temperature -20° to +45°C
- Thermal PC-white
- Dimmable

<https://nedes.eu/led-linear-light-with-socket-15w/ip44/600/cct-lnl7621/whe/p-1302>



Art.Nr. **LNL7621/WHE**

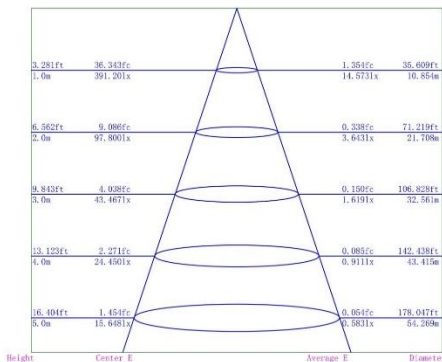


- 15W
- AC180-265V
- 1700Lm
- IP44
- vypínač
- Rozmer 595 x 57 x 65mm
- Hmotnosť netto – 468g
- 3000K - 4000K – 6000K
- E
- 150°
- 30000h
- Záruka 3 roky
- Bal. 1/25
- Doporučená teplota okolia -20° až +45°C
- Thermal PC-biela
- Stmievateľné

<https://nedes.sk/led-podlinkove-svietidlo-so-zasuvkou-15w/ip44/600/cct-lnl7621/whe/p1302>



## Produktový list

Art.Nr. **LNL7621/WHE**

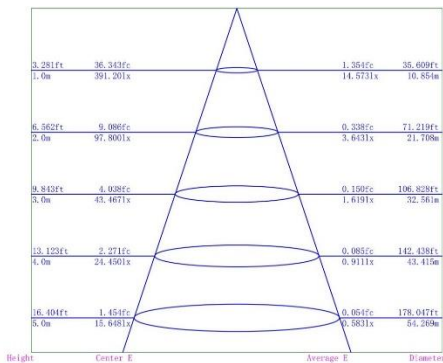


- 15W
- AC180-265V
- 1700Lm
- IP44
- vypínač
- Rozměr 595 x 57 x 65mm
- Hmotnost netto - 468g
- 3000K - 4000K – 6000K
- E
- 150°
- 30000h
- Záruka 3 roky
- Bal. 1/25
- Doporučená teplota okolí -20° až +45°C
- Thermal PC-bílá
- Stmívatelné

<https://nedes.cz/led-podlinkove-svitidlo-se-zasuvkou-15w/ip44/600/cct-lnl7621/whe/p-1302>



## Termék adatlap

Art.Nr. **LNL7621/WHE**

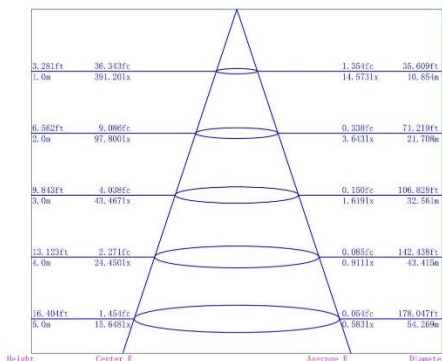


- 15W
- AC180-265V
- 1700Lm
- IP44
- Kapcsoló
- Merét 595 x 57 x 65mm
- Nettó tömeg – 468g
- 3000K - 4000K – 6000K
- E
- 150°
- 30000h
- 3 év garancia
- Csomagolás 1/25
- Ajánlott környezeti hőmérséklet -20° és +45°C
- Thermal PC-fehér
- Dimmelhető

<https://nedes.hu/led-lampatest-aljzattal-15w/ip44/600/cct-lnl7621/whe/p-1302>



Art.Nr. **LNL7621/WHE**

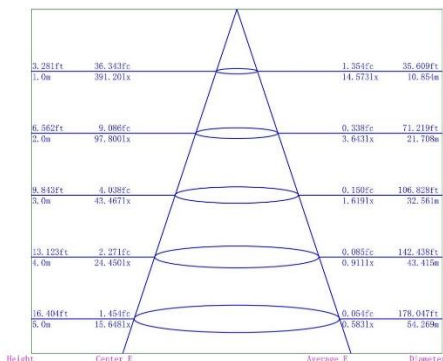

- 15W
- AC180-265V
- 1700Lm
- IP44
- Schalter
- Dimension 595 x 57 x 65mm
- Nettogewicht – 468g
- 3000K - 4000K - 6000K
- E
- 150°
- 30000St
- Garantiezeit 3 Jahre
- Verpackung 1/25
- Empfohlene Umgebungstemperatur -20° bis +45°C
- Thermal PC-Weiß
- Dimmbar

<https://nedes.at/led-linearleuchte-mit-steckdose-15w/ip44/600/cct-lnl7621/whe/p-1302>